
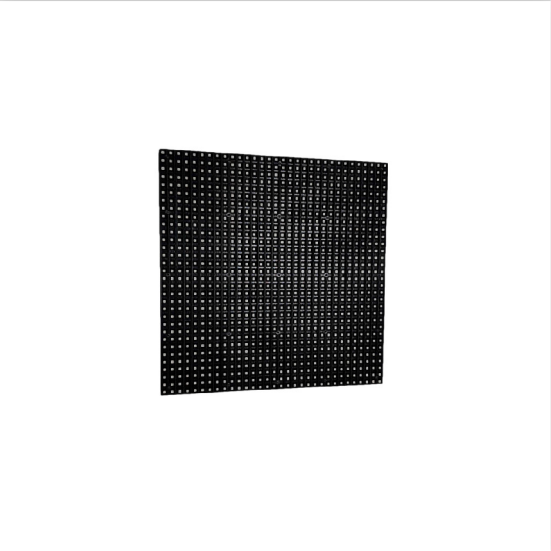



GKGD

Specification of P6 Outdoor LED Module

Module	Module photo
Pixel pitch	6mm
Pixel Density	27778 dots/m²
Pixel configuration	1R1G1B
LED type	SMD2727
Module size	W192 *H192mm
Module weight	282.6±5g
Module resolution	W32*H32 dots
Module QTY/ m²	27.127 pcs/ m²
Min. Viewing Distance	≥4m
Brightness	≥5000 cd/m²
Viewing Angle	H≥120° V≥120°
Driving Mode	1/8 scan constant current
Interface	HUB75
Input voltage	5V
Max. Power Consumption	978 w/m²
Avg. Power Consumption	339 w/m²
Max. Current	5 A
Gray Level	16bits (65536)
Vedio frame rate	60 frames/s
Refresh Rate	≥1920Hz ≥3840Hz
Defective Dots Rate	<0.0001 (LED industry standard: ≤ 0.0003)
Decay Rate	<5%/year
Brightness Conformity	>95%
Colors	65539*
MTBF	>10000 hours
Lifespan	>100000 hours
Protective function	Over-heat/Over-load /Power-down /Power-leakage /Lightning-protection etc.
Operating Temperature	-40℃~+80℃
Operating Humidity	10-90% no condensation
Storage Temperature	-60℃~+80℃
Storage Humidity	10-95% no condensation
Control system parameter	
Color temperature	Adjustable by software
Brightness level	256 levels, automatic or manual adjustment;
Control way	Computer, real-time, off-line, wireless, internet etc
Communication Distance	Cat5 UTP 100 meters, max. 120 meters, or optical fiber.
Packing	
Carton	4Opcs/carton, size: 645*320*145mm, weight: 15.4kgs

Note: The specification may subject to change without prior notice.

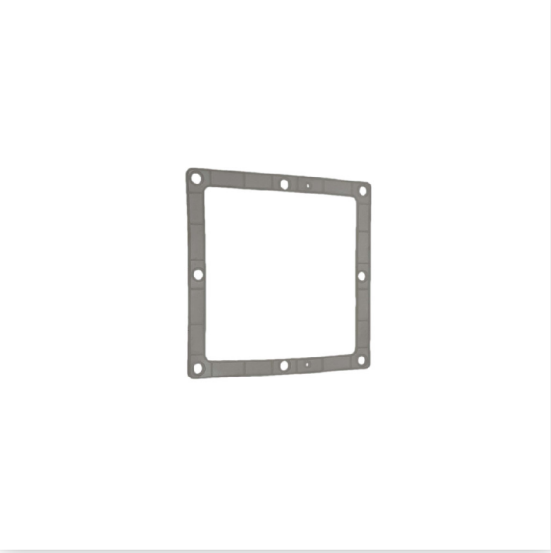

Модуль светодиодный Outdoor P6 SMD1921 RGB (192*192) GM31D-Z226 GKGD

Артикул GM31D-Z226 P6 Outdoor RGB

В наличии	**40 шт.**
Склад Красноярск	40 шт.

Характеристики

Производитель	GKGD
Тип светодиода	RGB
Тип светодиода	SMD1921
Температура хранения, С	от -20 до +60
Влажность при хранении, %	10-80

Компьютер, в режиме реального времени, автономный, беспроводной, интернет

Расстояние связи, m	Cat5 UTP 100-130; или оптическое волокно
Уровень яркости	256 уровней, автоматическая или ручная регулировка.
Цветовая температура	Регулируется программным обеспечением
Назначение	Outdoor (уличные)
Шаг пикселя, mm	P6
Плотность пикселя, pix/m2	27778
Конфигурация пикселя	1R1G1B
Размер модуля, mm	192*192
Вес модуля, g	290
Разрешение модуля, mm	32*32
Количество модулей в m2	27.13
Минимальное расстояние для просмотра, m	6
Яркость, cd/m2	4500
Угол обзора	140/120
Интерфейс	HUB75
Напряжение, VDC	5
Максимальное потребление, w/m2	760
Среднее потребление, w/m2	380
Уровень серого	16 bit
Кадров в секунду	60
Частота обновления, Hz	1920

Перегрев, перегрузка, отключение питания, утечка энергии, молниезащита

Рабочий диапазон температур, С	от -20 до +60
Рабочий диапазон влажности, %	10-80