


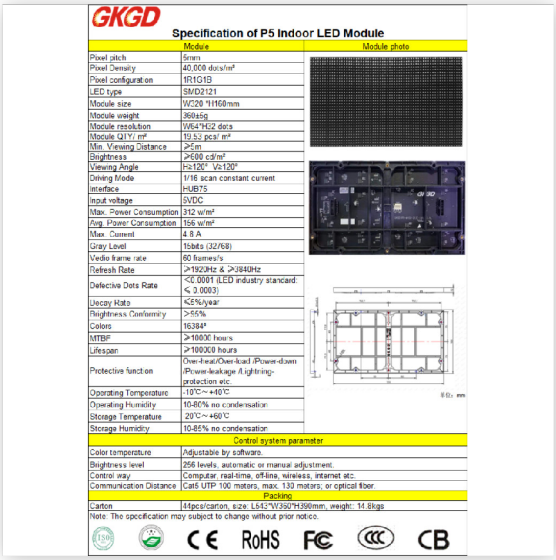


GKGD

Specification of P5 Indoor LED Module

Module	Module photo
Pixel pitch	5mm
Pixel Density	40,000 dots/m²
Pixel configuration	1R1G1B
LED type	SMD2121
Module size	W320*H160mm
Module weight	360±5g
Module resolution	W64*H32 dots
Module Q'TY/ m²	19.53 pcs/ m²
Min. Viewing Distance	≥5m
Brightness	≥600 cd/m²
Viewing Angle	H:≥120° V:≥120°
Driving Mode	1/16 scan constant current
Interface	HUB75
Input voltage	5VDC
Max. Power Consumption	312 w/m²
Avg. Power Consumption	156 w/m²
Max. Current	4.8 A
Gray Level	15bits (32/69)
Vedio frame rate	60 frames/s
Refresh Rate	≥1920Hz & ≥3840Hz
Defective Dots Rate	<0.0001 (LED industry standard: ≤ 3.0003)
Decay Rate	≤5%/year
Brightness Conformity	>95%
Colors	16384³
MTBF	≥10000 hours
Lifespan	≥100000 hours
Protective function	Over-heat/Over-load /Power-down /Power-leakage /Lightning-protection etc.
Operating Temperature	-10℃~+40℃
Operating Humidity	10-80% no condensation
Storage Temperature	20℃~+60℃
Storage Humidity	10-85% no condensation
Control system parameter	
Color temperature	Adjustable by software.
Brightness level	256 levels, automatic or manual adjustment.
Control way	Computer, real-time, off-line, wireless, internet etc.
Communication Distance	Cat5 UTP 100 meters, max. 130 meters; or optical fiber.
Packing	
Carton	44pcs/carton, size: L642*W350*H390mm, weight: 14.8kgs

Note: The specification may subject to change without prior notice.

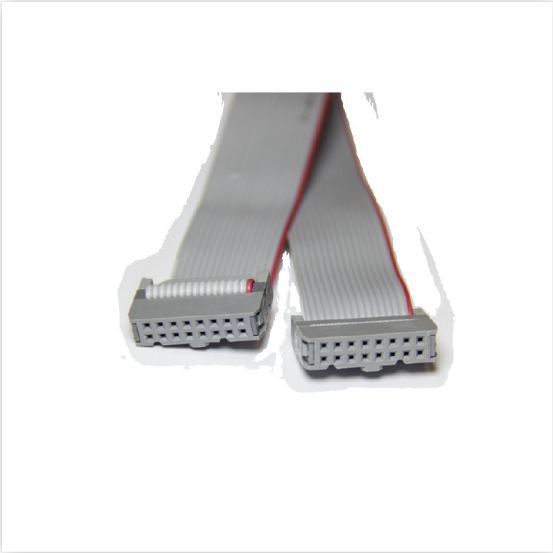

Модуль светодиодный Indoor P5 SMD RGB HJMA409 GKGD

Артикул HJMA409 P5 Indoor RGB

В наличии	**10 шт.**
Склад Красноярск	10 шт.

Характеристики

Производитель	GKGD
Температура хранения, С	от -20 до +60
Влажность при хранении, %	10-85

Компьютер, в режиме реального времени, автономный, беспроводной, интернет

Расстояние связи, m	Cat5 UTP 100-130; или оптическое волокно
Уровень яркости	256 уровней, автоматическая или ручная регулировка.
Цветовая температура	Регулируется программным обеспечением
Режим сканирования	1/16
Частота дефектных точек, менее	0.0001
Скорость деградации диодов, менее	5%/год
Соответствие яркости, более	95%
Количество цветов	16 384³
Срок службы часов, не менее	100 000
Цвет свечения	RGB
Назначенние	Indoor (для помещений)
Шаг пикселя, mm	P5
Плотность пикселя, pix/m2	40 000
Конфигурация пикселя	1R1G1B
Тип светодиода	SMD2121
Размер модуля, mm	320*160
Вес модуля, g	360
Разрешение модуля, mm	64*32
Количество модулей в m2	19.53
Минимальное расстояние для просмотра, m	5
Яркость, cd/m2	600
Угол обзора	120/120
Интерфейс	HUB75
Напряжение, VDC	5
Максимальное потребление, w/m2	312
Среднее потребление, w/m2	156
Уровень серого	15 bit
Кадров в секунду	60
Частота обновления, Hz	1920

GKGD